


FIG. 7

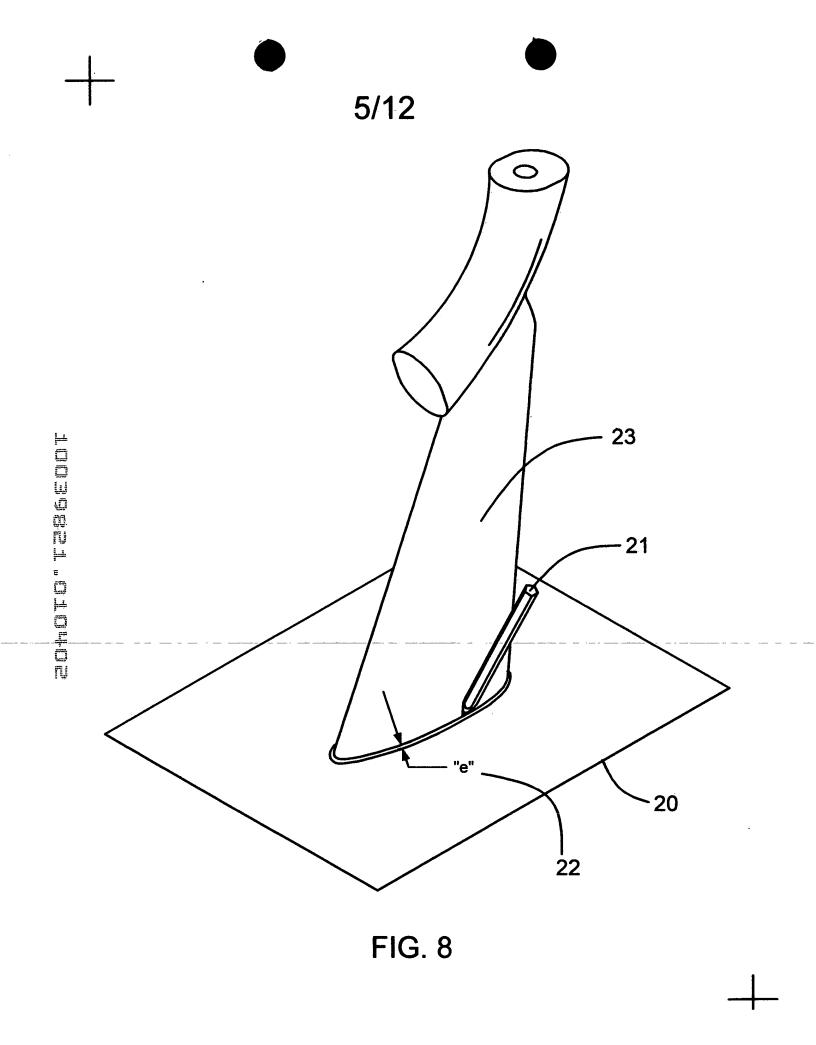

6/12

Pro-Fit® Recoil Pads

Ö


Eclectic Technologies Inc. Copyright December 2000, Data Aquisition Form © Profile & Parametric , Farmington CT

Note:

measuring tools, use EclecTech's Print-on-Paper Virtual-Protractor® & Virtual-If you do not have real Scale®

to accurately determine dimensions!

O



1 division = 125 Inch **Grid Scale:**

Profile & Screw Hole Locations Here * Use fine tip pen or pencil to minimize tracing offset error "O", which is the Accurately Trace Stock

distance from the center of the traced line to the actual edge of the stock)

DIMENSIONAL DATA

measured accurately from stock)

Bottom "toe" Angle,

op "heel" Angle,

Maximum Length Maximum Width,

Screw Spacing,

Bottom Screw Position


inches inches inches


Specify Desired Fit with Stock (check one) **Estimated Trace Offset**


inches** larger than stock ☐ Oversize, Specify_

☐ Exact Fit, Flush with Stock

inches** smaller than stock ** Distance is offset from edge, not overall size. ☐ Undersize, Specify





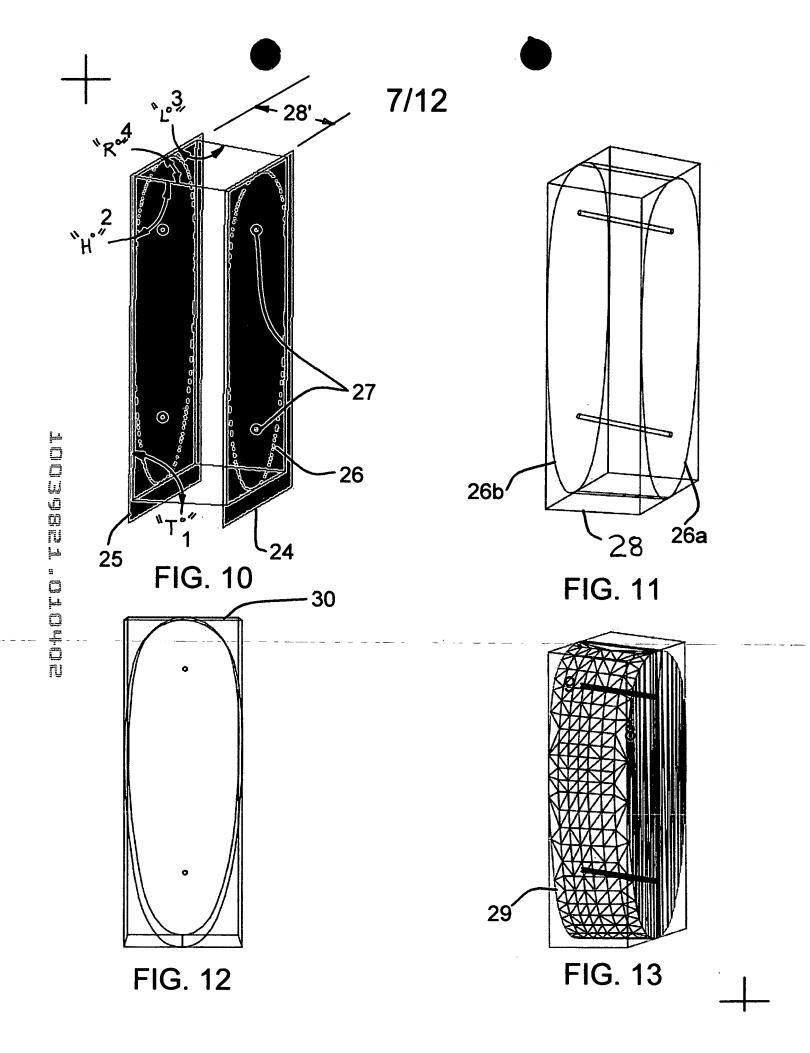

TOOUSBET . CLOUP

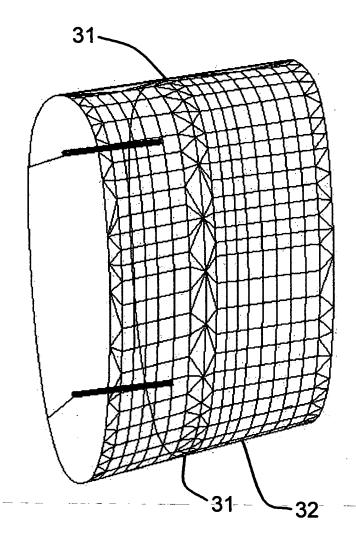


FIG. 14

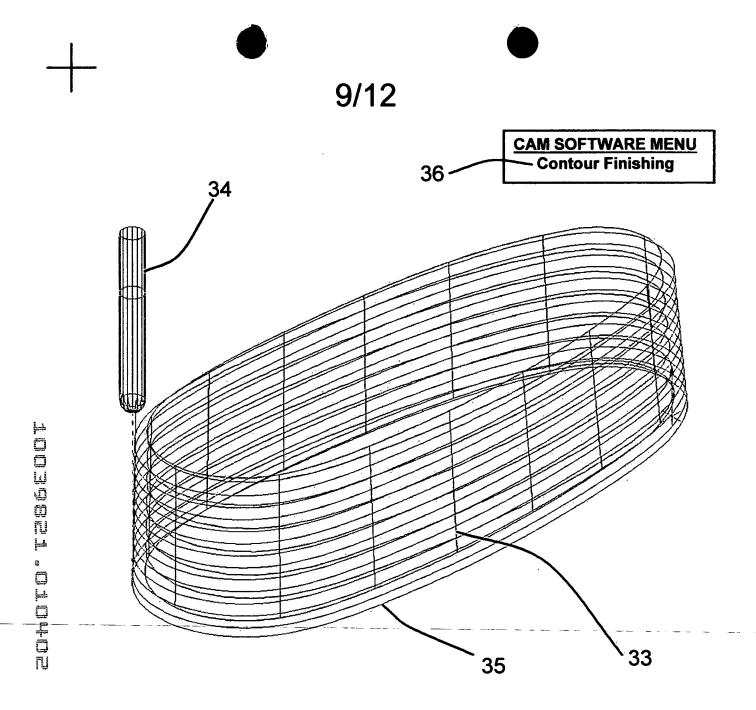
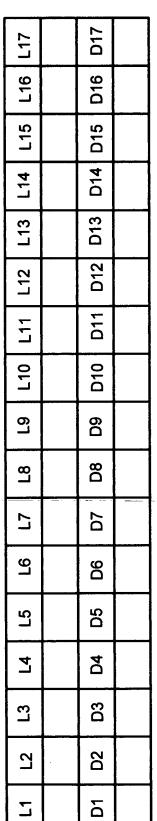


FIG. 15

11/12

Dimensional Data:

Measure Length to nearest 1/16 inch Measure Diameter in 1/1000 inch



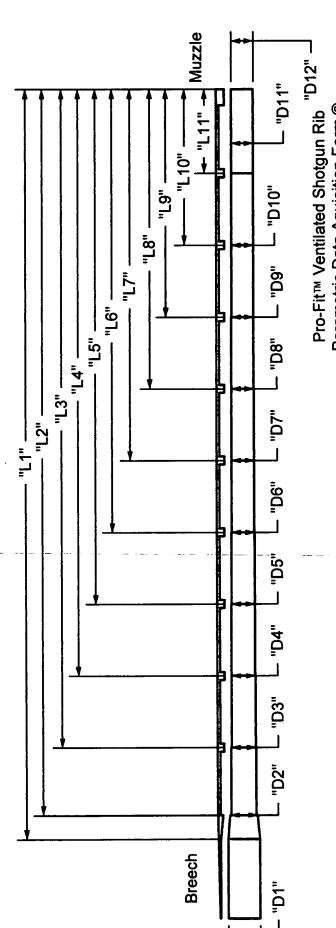


FIG. 17

Copyright December 2000, Eclectic Technologies Inc., Farmington CT

Parametric Data Aquisition Form @